

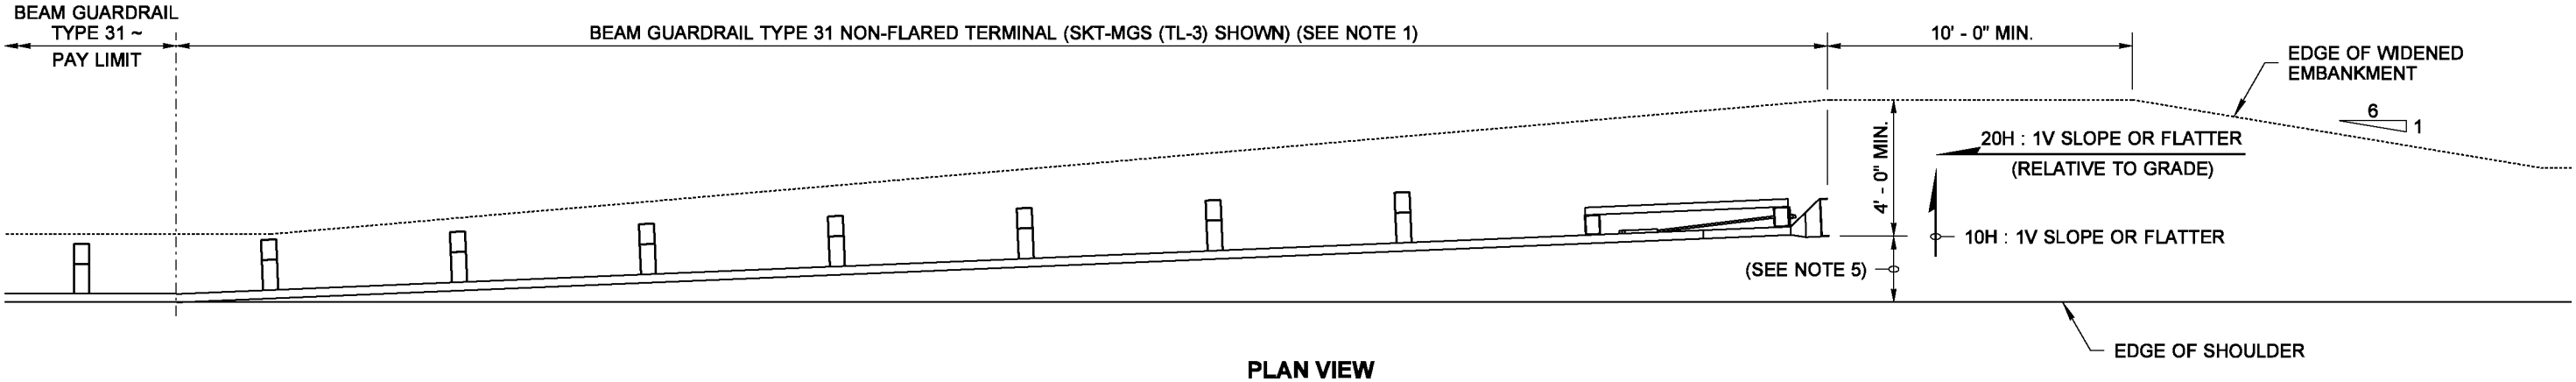


NOTES

1. An SKT-MGS (TL-3) as manufactured by Road Systems, Inc. shall be installed according to the manufacturer's recommendations.
2. A reflectorized object marker shall be installed according to the manufacturer's recommendations.
3. When snow load post washers and snow load rail washers are required by the Contract, the snow load rail washers shall not be installed within the terminal limits.
4. Terminal shall be installed at a widening, ensuring the end piece is entirely off the shoulder. While this terminal does not require an offset at the end, a flare is recommended. A maximum flare rate of 25 : 1 or flatter over the length of the terminal is allowed for the SKT-MGS (TL-3).
5. This terminal is FHWA accepted at Test Level Three (TL-3) and may be used for all posted speeds.
6. For terminal details, see WSDOT approved manufacturer's drawings.

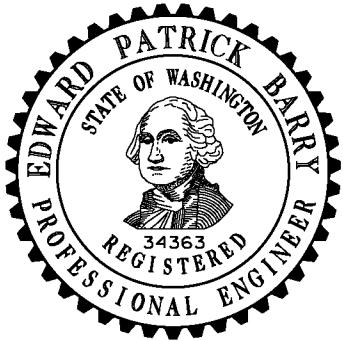

PLAN VIEW

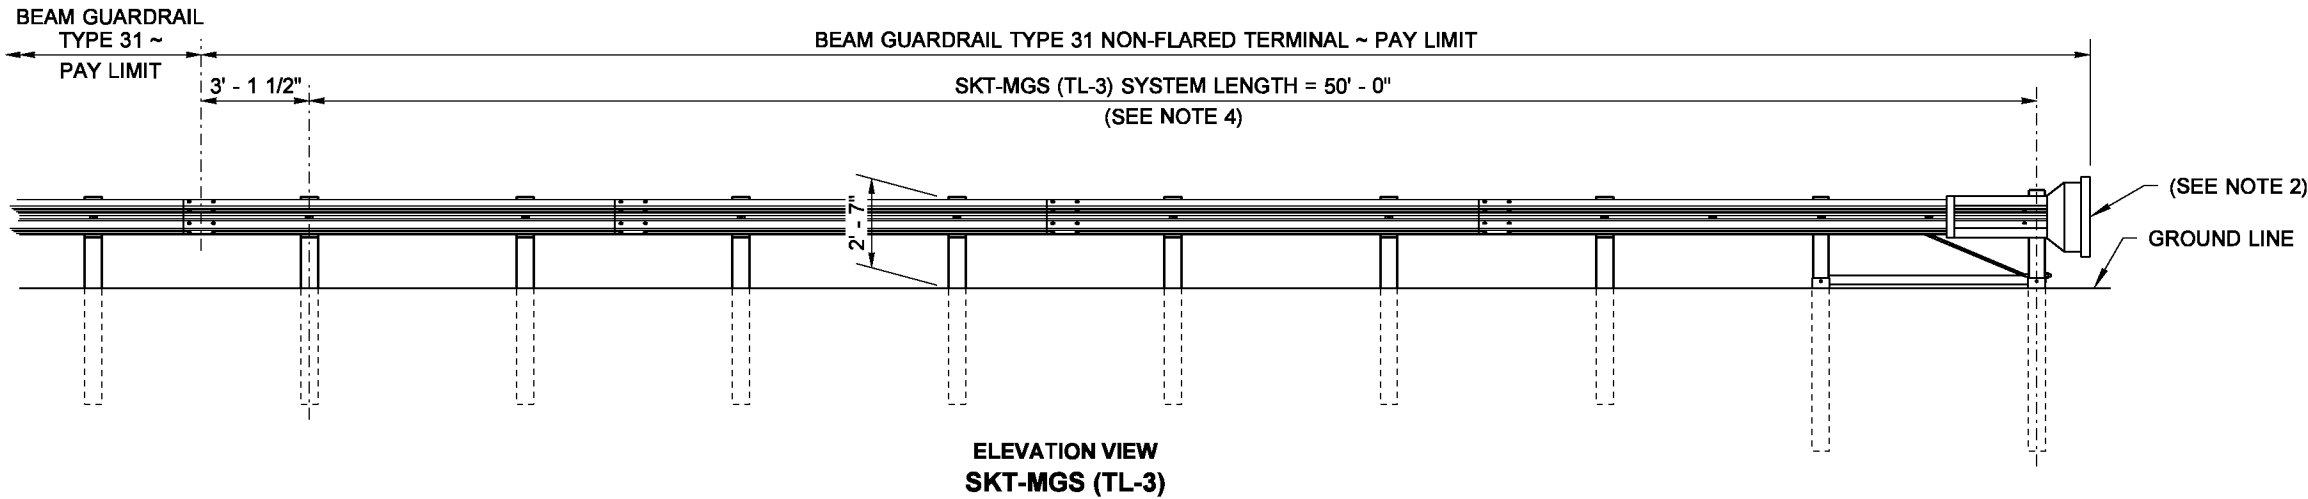

**BEAM GUARDRAIL TYPE 31  
NON-FLARED TERMINAL WOOD  
POSTS (ALL POSTED SPEEDS)  
STANDARD PLAN C-22.41-01**

SHEET 1 OF 1 SHEET

APPROVED FOR PUBLICATION

STATE DESIGN ENGINEER  
Washington State Department of Transportation